iLLustra Handlaufleuchte

Suit for handrail size Ø42.4mm and wall thickness 2mm
Color temperture 1800K-6500K
IP67 waterproof
suit for class 2 power unit,
maximum connected power not more than 100W





IP67 IP Rating


DC-IN

Easy Installation

Extreme Environments

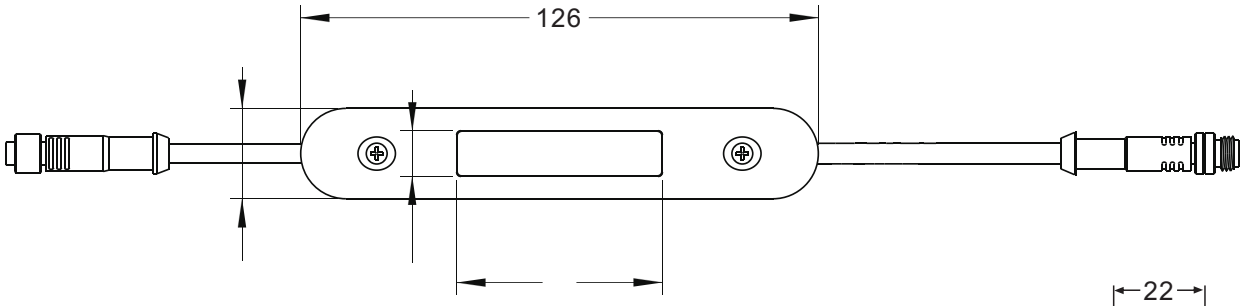




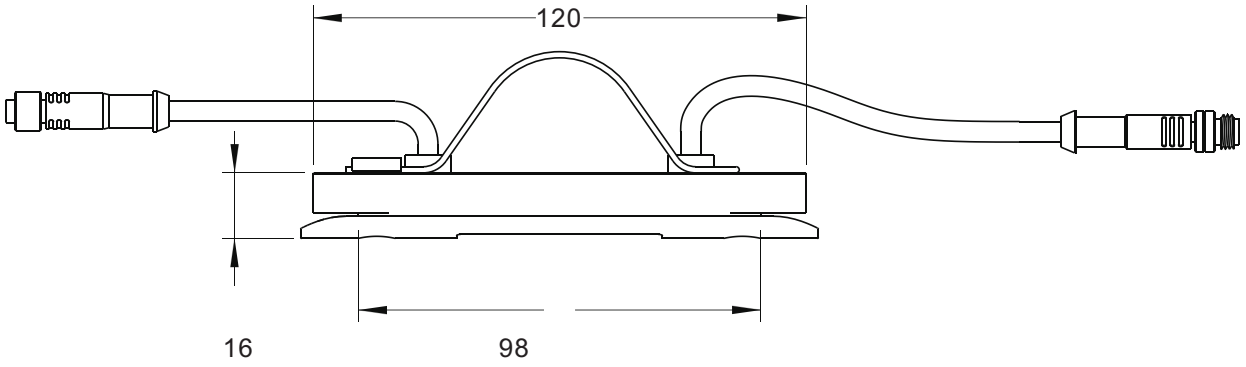

Swiss Lighting Solution Badstrasse 4 5408 Ennetbaden www.SLS1.ch Tel. 056 249 01 00


Basic Parameter

LED Size		2835
LED Q'ty		7 pcs
Lamp housing material		Aluminum
Cover (Diffuser) material		PMMA
Working Temperature		-20~+45 ℃
IP Class		IP67
Beam Angle	65° (Asymmetrical)	95° (Symmetrical)

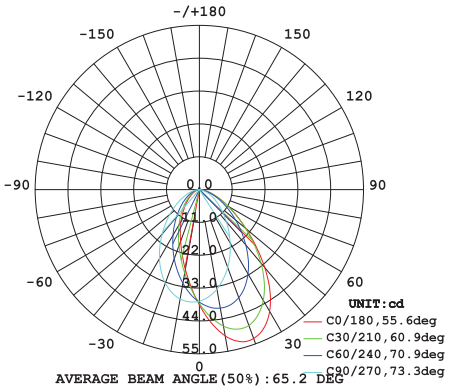

Electrical Parameter

Power	3W
Input Voltage	24 V

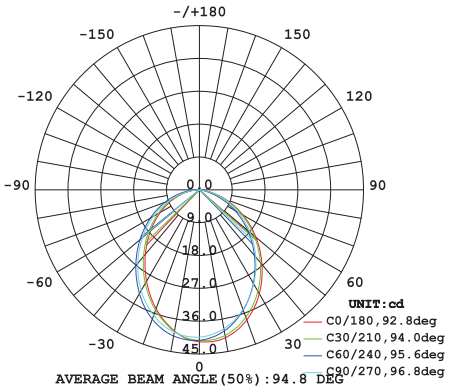


Optical Parameter


CCT		2700K **3000K** 4000K 6000k
Luminous Flux	72 Lm (Asymmetrical)	97 Lm (Symmetrical)
Luminous Efficiency	24 Lm/W (Asymmetrical)	32 Lm/W (Symmetrical)
CRI		≥80

Installation Method


① Ausschnitt : 16 x 102 mm

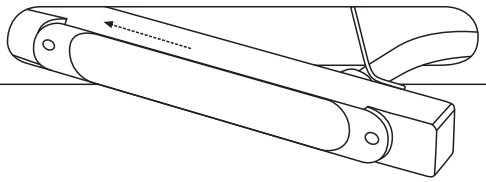


② Einbau



③ Befestigung

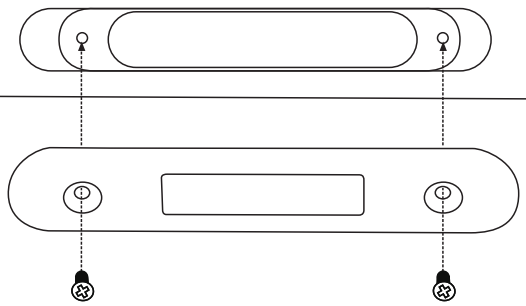

④ Fertig.



iLLustra Handlaufleuchte

Swiss Lighting Solution Badstrasse 4 5408 Ennetbaden www.SLS1.ch Tel. 056 249 01 00